



Probing Solutions.
Made in Germany.

EN



PHV **X**^{ⓀV} – Series

High Voltage Probes
for Precision Power Electronics Testing

4000 V, > 600 MHz, < 3 pF

Datasheet



About PHVX Series Probes for Precision Power Electronics Testing

The PHVX high-voltage probe series establishes itself as a best-in-class solution for the evolving demands of modern power electronics design. With the launch of the first 4 kV model, the PHVX4kV, the series is ideal for applications such as low-side V_{DS} measurements during pulse testing of high-speed switching devices like SiC-based components, IGBTs, thyristors, fast-switching HV diodes, and more.

All PHVX models are engineered to deliver precise and consistent results, enabling designers to optimize the performance and efficiency of their power electronic systems with confidence.

- With ultra-low <3 pF input capacitance and a bandwidth exceeding 600 MHz for 2 and 3 meter models and <4 pF and 300 MHz for 5 meter models, the PHVX series enables accurate, reliable measurements of fast-switching devices, making it an indispensable tool for engineers developing advanced designs in protected test environments.
- The PHVX series introduces a unique contacting concept that ensures high signal fidelity in high-voltage measurements across various applications. The rotatable 360° ground rings allow flexible, direct connection to 5.08 mm (2.5 kV) or 7.62 mm (4 kV) pitch square pin headers, without adding capacitive loading to the DUT. This enables precise acquisition even at hard-to-reach test points. A wide range of accessories, including soldering adapters, BNC connectors, and additional tools, ensures safe and easy connectivity to the DUT for this non-handheld probe.

All PHVX probes feature a universal BNC output connector and are compatible with any oscilloscope equipped with a $1\text{ M}\Omega$ input impedance.

Each voltage model is available in different cable lengths and configurations, optionally with or without intelligent read-out functionality and additional silicone insulation (S) for high-power measurements. The intelligent read-out (RO) enables automatic scaling and identification on the oscilloscope. Fully equipped models including both read-out and silicone insulation are denoted with the suffix –S–RO.

Please refer to the ordering information for a complete list of available models and accessories.

Specifications

Read the Instruction Manual before first use and keep it for future reference. A digital copy of the latest Instruction Manual revision can be downloaded at www.pmk.de.

Do not exceed the specifications. Allow the probe to warm up for 20 minutes. This probe comes with 1 year warranty. Each specification is determined at +23 °C ambient temperature. This probe series is not for hand-held use.

Electrical Specifications

Electrical Specifications¹ that are not marked with (*) as guaranteed are typical.

Models ²	PHVX4kV-2-x Models PHVX4kV-3-x Models	PHVX4kV-5-x Models
Attenuation* ($\leq \pm 1$ % guaranteed)	100:1	
Maximum Rated Input Voltages ¹		
No Measurement Category	4000 V rms / 4000 V pk / 4000 V DC	
CAT Rating	not applicable	
Pollution Degree	2	
DC Gain Accuracy ³	± 0.5 % (preliminary)	
Input Impedance	50 M Ω < 3 pF	50 M Ω < 4 pF
Compensation Range	10 pF – 25 pF	
Input Coupling of the Measuring Instrument	1 M Ω	



The electrical specifications are valid for use in a controlled environment, like a semi-conductor tester or test setup with protective cover.

Models	PHVX4kV type		
Article numbers ²	PHVX4kV-2-0 PHVX4kV-2-0-RO PHVX4kV-2-S PHVX4kV-2-S-RO	PHVX4kV-3-0 PHVX4kV-3-0-RO PHVX4kV-3-S PHVX4kV-3-S-RO	PHVX4kV-5-0 PHVX4kV-5-0-RO PHVX4kV-5-S PHVX4kV-5-S-RO
Cable Length	2m	3m	5m
Bandwidth* (-3 dB) Small Signal (guaranteed)	> 600 MHz	> 600 MHz	> 300 MHz
Rise time (10 % - 90 %) Large Signal	< 800 ps	< 800 ps	< 1.2 ns

Mechanical Specifications

Parameter	Specification
Weight (Probe only)	Model dependent
Length ⁴	Model dependent
Probe Input	To position on 0.64mm (0.025") square pin header(s)
Output Connector ⁵	BNC (Male)

Notes:

¹ The rating is based on basic insulation in a controlled environment in accordance with IEC 61010-1. Also observe further definitions in the probe series' instruction manual, voltage derating graph and probe accessory ratings in the referring manual section.

² Each model is available with read-out, and w/o extra silicone cable insulation for measurements in high power applications. See "Ordering Information"

³ Input voltage >25%


⁴ Depending on model, available in different lengths

⁵ Depending on model, available with or without read-out

Environmental Specifications

Parameter		Specification
Temperature Range	Operating	0 °C to +50 °C
	Non-Operating	-40 °C to +71 °C
Maximum Relative Humidity	Operating	80 % relative humidity for temperatures up to +31 °C, decreasing linearly to 40 % at +45 °C, non-condensing humidity
	Non-Operating	95 % relative humidity for temperatures up to +40 °C
Altitude	Operating	up to 2000 m
	Non-Operating	up to 15000 m


Dimensional Drawing

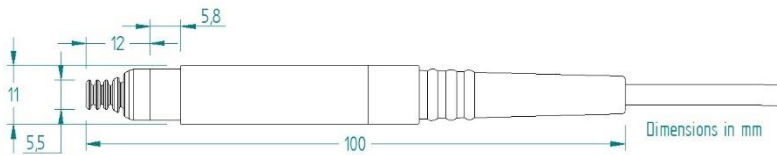

Typical Voltage Derating




Note that the maximum input voltage rating of the probe decreases as the frequency of the applied signal increases.

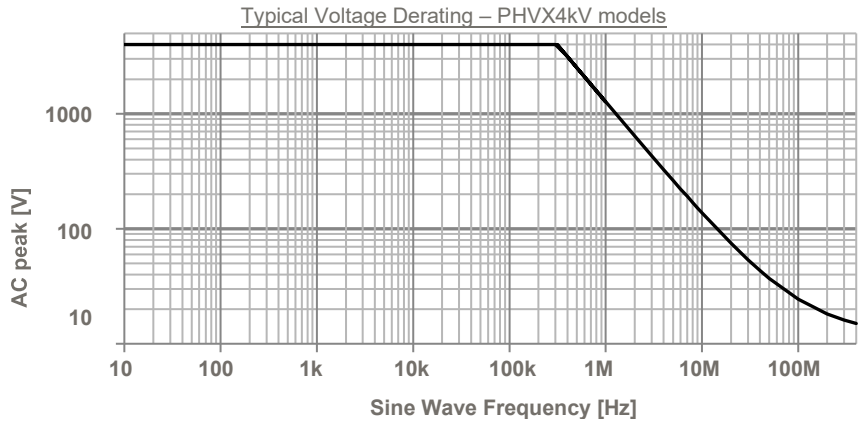

Typical Input Impedance



The input impedance of the probe decreases as the frequency of the applied signal increases.

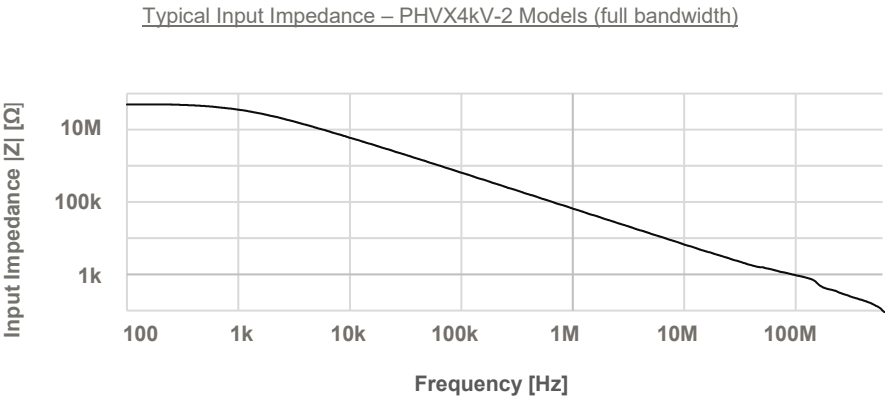

Probe Accessory Ratings



PHVX probes and all accessories are fixed voltage-measuring components of a test system and not intended for handheld use. They are designed for integration into semi- or fully automated test stations only.



Do not exceed the accessory ratings.



Use ground accessories and ground leads only for connections to earth ground.



Make sure no tip is inserted when attaching any other accessory.
Do not use any other accessories than recommended.

The accessories provided with the probe have been safety tested.



Connect and disconnect properly.

Connect the probe output to the measurement instrument and the ground lead to earth ground before connecting the probe to the de-energized circuit under test.


Disconnect the probe input and the probe ground lead from the de-energized circuit under test before disconnecting the probe input from the measurement instrument.

PHVX-PCB Adapter 4000V (890-440-001)

- Pollution Degree: 2
 - Maximum Voltage Rating: 4000V DC or AC peak
- Tester component, no Measurement Category, not for handheld use




Observe layout requirements.

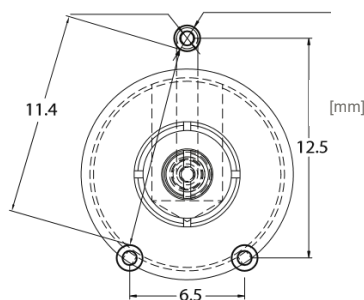

Drilling / Soldering Template

ø 0.8mm Drilling
 ø 1.4mm Soldering Pads

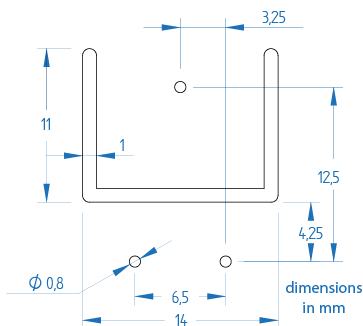

PCB Template

A cut in the PCB beneath the adapter is required to increase the creepage distance between the contacts, otherwise the rating is not valid.



The minimum distance between all solder pads of 11.4mm (see Drilling /Soldering template) must not be undercut under any circumstances. Undercutting this distance will void the rating.

PHVX-BNC Adapter (890-440-002)

- Pollution Degree: 2
- Maximum Voltage Rating: 750V DC or AC pk
Tester component, no Measurement Category, not for handheld use

**PHVX-Dual adapter to 2mm banana (890-440-003)**

- Pollution Degree: 2
- Maximum Voltage Rating: 4000V DC or AC peak
Tester component, no Measurement Category, not for handheld use



Observe the minimum required distance between contacts.
See PHVX-PCB Adapter 4kV section for more layout information.



The plastic case of the clamps does not supply adequate isolation.

PHVX-Sprung Hook red (890-440-004)

- Pollution Degree: 2
- Maximum Voltage Rating: 4000V DC or AC peak
Tester component, no Measurement Category, not for handheld use



Observe the minimum required distance between contacts.
See PHVX-PCB Adapter 4kV section for more layout information.

PHVX-GND ring "A" for 2500V DC or AC peak (890-440-005)


- Pollution Degree: 2
- Maximum Voltage Rating: 2500V DC or AC peak
Tester component, no Measurement Category, not for handheld use




Observe the minimum required distance between contacts.



When using pin headers, it is recommended no other connection is in between, otherwise the rating is not valid

**PCB Template:**

A cut in the PCB beneath the ground adapter "A" for 5.08mm pitch is required to increase the creepage distance between the contacts, otherwise the rating is not valid



PHVX-GND ring "B" for 4000V DC or AC peak (890-440-015)


- Pollution Degree: 2
- Maximum Voltage Rating: 4000V DC or AC peak
Tester component, no Measurement Category, not for handheld use



Observe the minimum required distance between contacts.




When using pin headers, make sure no other connection is in between, otherwise the rating is not valid



PCB Template:



A cut in the PCB beneath the ground adapter "B" for 7.62mm pitch is required to increase the creepage distance between the contacts, otherwise the rating is not valid



PHVX-Dual adapter to 2mm banana, with pair of clamps (890-440-009)

- Pollution Degree: 2
- Maximum Voltage Rating: 4000V DC or AC peak
Tester component, no Measurement Category, not for handheld use



Observe the minimum required distance between contacts.
See PHVX-PCB Adapter 4kV section for more layout information.



Pay attention to partial discharge.



The plastic case of the clamps does not supply adequate isolation.

Set 2 clamps, for use with 2mm banana plugs (890-440-010)

- Pollution Degree: 2
- Maximum Voltage Rating: 4000V DC or AC peak
Tester component, no Measurement Category, not for handheld use



Observe the minimum required distance between contacts.
See PHVX-PCB Adapter 4kV section for more layout information.



Pay attention to partial discharge.




The plastic case of the clamps does not supply adequate isolation.

Scope of Delivery

See chapter “Ordering Information” to review the selection of accessories.

- 1x PHVX series probe
- 1x **890-440-005** PHVX-GND ring “A” for 2500V DC or AC peak, 5.08mm pitch
- 2x Spring tip, gold-plated
- 2x Solid tip, gold-plated
- 1 **890-440-008** PHVX-GND ring with 10cm GND lead to 2mm banana, with clamp
- 1x **890-880-101** Set of 10 Contact Pins 0.64mm
- 3x Pin connectors, 7 pin single row, pin width 0.635m (SL 1 053 7 G)
- 1x Set cable coding rings (3x4 colors)
- 1x **018-292-007** Trimmer tool
- 1x Instruction manual

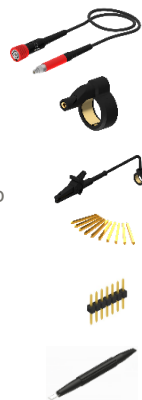

Ordering Information

Step 1: Select Base Probe

Each voltage model is available in different cable lengths and configurations, w/o intelligent read-out function, and w/o additional Silicone insulation (S) for high power measurements. The optional read-out (RO) features intelligent communication with automatic scaling on the oscilloscope display. The fully equipped model with intelligent read-out and extra Silicone insulation end with nomenclature -S-RO.

4000V DC / 4000V pk, **2m cable length**, >600MHz, 100:1 divider models:

PHVX4kV-2-0-RO	with read-out
PHVX4kV-2-S-RO	with readout, with additional Silicone insulation for high current applications
PHVX4kV-2-0	no readout
PHVX4kV-2-S	no readout, with additional Silicone insulation for high current applications

4000V DC / 4000V pk, **3m cable length**, >600MHz, 100:1 divider models:

PHVX4kV-3-0-RO	with read-out
PHVX4kV-3-S-RO	with readout, with additional Silicone insulation for high current applications
PHVX4kV-3-0	no readout
PHVX4kV-3-S	no readout, with additional Silicone insulation for high current applications

4000V DC / 4000V pk, **5m cable length**, bandwidth >300 MHz, 100:1 divider models:

PHVX4kV-5-0-RO	with read-out
PHVX4kV-5-S-RO	with readout, with additional Silicone insulation for high current applications
PHVX4kV-5-0	no readout
PHVX4kV-5-S	no readout, with additional Silicone insulation for high current applications

Step 2: Select Additional Accessories

More PHVX-series connectivity options are in planning. If no fitting solution is shown below, please reach out to sales@pmk.de with your specific need and application information.

890-440-001	PHVX-PCB Adapter 4000V max 4000V DC or AC peak (observe layout requirements) same footprint as PMK's high voltage PCB-Adapter 5.0-L for PMK's PHV1000/2000 series
890-440-002	PHVX-BNC Adapter
890-440-003	PHVX-Dual adapter to 2mm banana
890-440-004	PHVX-Sprung Hook (red)
890-440-005	PHVX-GND ring "A" for 2500V DC or AC peak (observe layout requirements) with 5.08mm pitch, for >360° rotational angle <i>included in scope of delivery</i>
890-440-015	PHVX-GND ring "B" for 4000V DC or AC peak (observe layout requirements) with 7.62mm pitch, for >360° rotational angle
890-440-007	PHVX-GND ring with GND lead to 2mm banana, without clamp
890-440-008	PHVX-GND ring with GND lead to 2mm banana, with clamp <i>included in scope of delivery</i>
890-800-001	Spring tips, gold-plated, 5x
890-800-000	Solid tips, gold-plated, 5x
890-440-009	PHVX-Dual adapter to 2mm banana, with pair of clamps (red/black)
890-440-010	Set 2 clamps (red/black), for use with PHVX-Dual adapter



Step 3: Select optional Calibration Certificate

KAL-PHVX4kV	factory calibration certificate
KAL-DAKKS-PHVX4kV	ISO 17025 (re-)calibration certificate

Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Copyright © 2026 PMK - All rights reserved.

Information in this publication supersedes that in all previously published material.
Specifications are subject to change without notice.

Informationen in dieser Anleitung ersetzen die in allen bisher veröffentlichten Dokumenten.
Änderungen der Spezifikationen vorbehalten.